

⋄ Features

- \cdot The grounded circuit prevent a short circuit. and over current of electricity.
- \cdot Anti-corrosive by STS #304 and efficient insulation structure.
- \cdot Internal circulation function by strong circulation pump.
- · Time set function and constant temperature.
- · Uniquely designed smooth exterior and circulation pump separable.

Specifications

Made in Korea

				made iii norea
Spec. / Model		COB-7	COB-12	COB-25
Туре		Circulator Oil Bath		
Controller		Digital PID Controller		
Range		Max 200 ℃		
Display		LED 4 Digital Display		
Temp	Accuracy	±0.2°C		
Size	Internal (WxDxH, mm)	300x160x150	330x220x170	400x350x180
Circulator Pump		Circulator Pump		
Safety		Over temp limiter		
Material	Internal	STS #304, Stainless steel Insulation (Ceramic wool 25mm)		
	External	Steel, Powder coating		
Electric Requirements		220VAC, 50 or 60Hz		
Heater		1500W	2000W	3000W




Circulator Oil Bath

www.hysc.co.kr

(Self cirulation)

Distinction

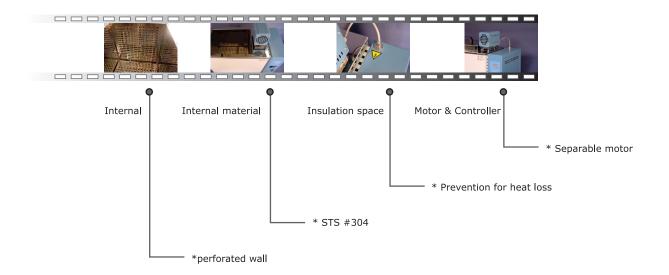

Structure

