

# Visible Water Bath

투시항온수조



## Features

- Equipped overheat protection sensor.
- Time set function and constant temperature.
- Uniquely designed smooth exterior and mono piece bath.
- Equipped internal bottom for the safety of the user and protection of the unit.

## Specifications


Made in Korea

Spec. / Model	VB-30	VB-55
Camber volume	30ℓ	55ℓ
Range	Amb +5℃~100℃	
Controller	Digital PID Controller	
Internal (W x D x H, mm)	370x220x370	500x300x370
External (W x D x H, mm)	450x285x715	570x365x715
Accuracy	±0.2℃	
Safety	Over temp limiter	
Internal	Stainless steel (#304)	
External	Steel, Powder coating	
Heater	Sheath Heater	
Windows	Tempered safety glass	
Electric Requirements	220VAC. 50/60Hz	
Power Consumption	2400W	4000W

# Visible Water Bath

## 투시항온수조

### ● Distinction

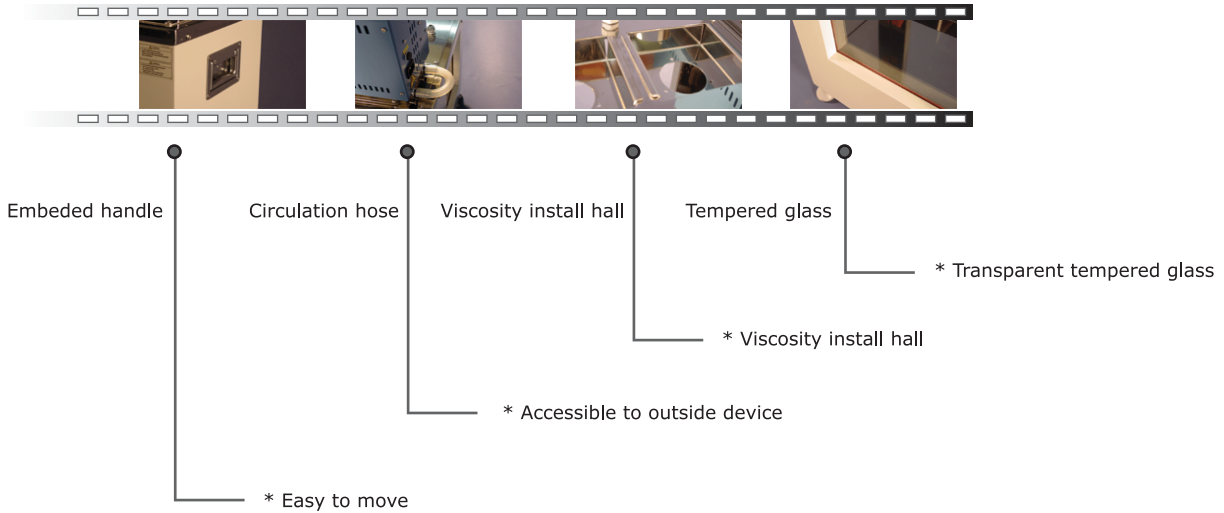

### ● Structure

